



All Categories



Search



ATAC > EPP > Getting started

Getting started



[EPPM] Setting Up Web Console

Follow



김희건(Tommy)

Created : 02/28/2024 · Edited : 04/15/2024


1. Overview

- This article describes the initial setup of the EPP Web Console.

2. Content


2-1) Initially Login EPP Web Console

- Access <https://EPP Server IP:8803>.

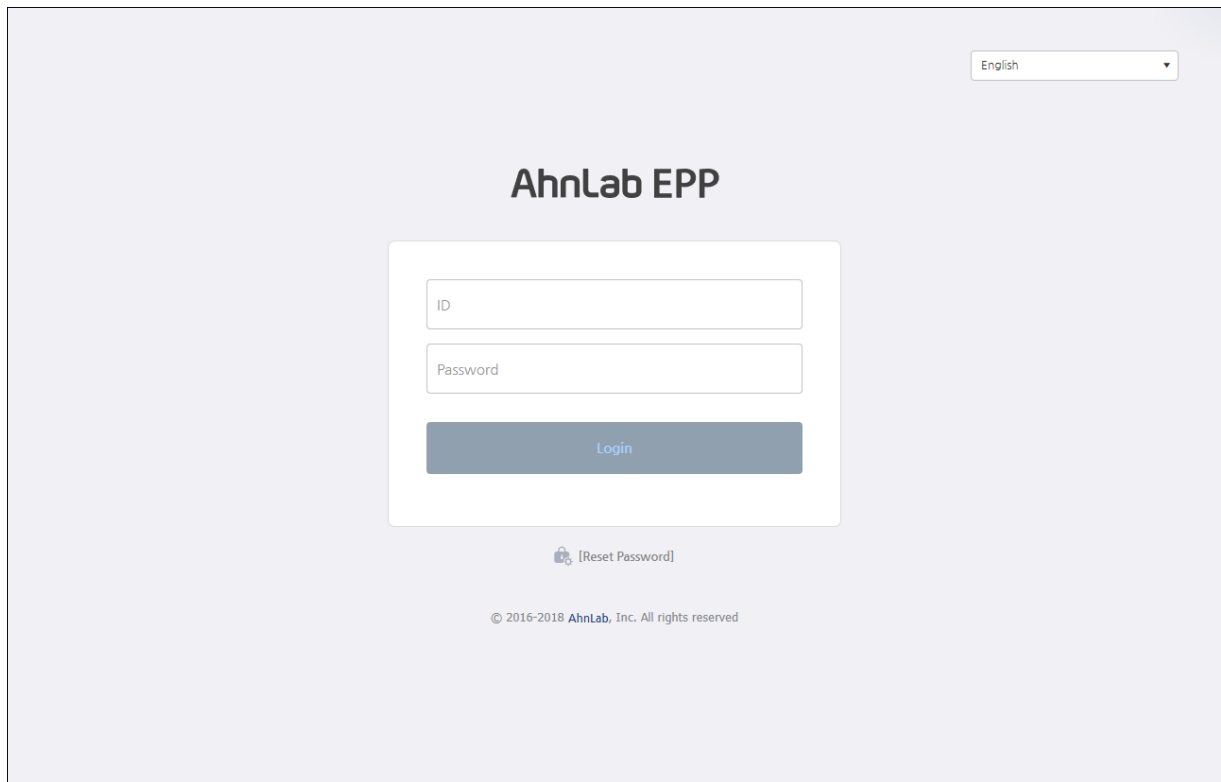

The image shows the login page for AhnLab EPP. At the top right, there is a language dropdown menu set to "English". The main heading is "AhnLab EPP". Below it, there is a white box containing two input fields: "ID" and "Password". Below these fields is a blue "Login" button. Under the "Login" button, there is a link with a lock icon and the text "[Reset Password]". At the bottom, there is a copyright notice: "© 2016-2018 AhnLab, Inc. All rights reserved".

- Enter the initial account information to log in.

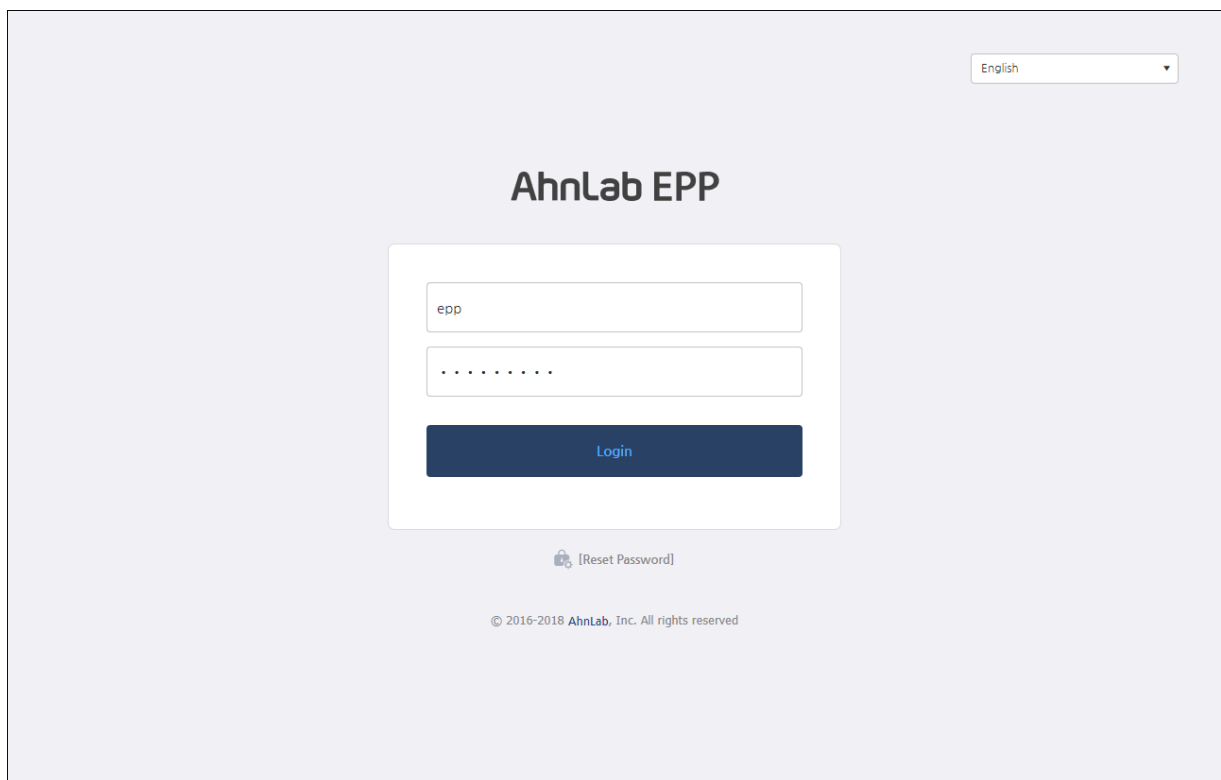

The image shows the login page for AhnLab EPP, similar to the first one, but with initial values entered. The "ID" field contains "epp" and the "Password" field contains a series of dots. The "Login" button is now dark blue. The "[Reset Password]" link and the copyright notice are still present.

※ Please contact ATAC for the initial ID and password for PW

2-2) EPP Web Console Initial Setup Wizard

- Step 1. Software License Agreement

Step 1. Software License Agreement

AhnLab Software License Agreement

IMPORTANT - READ CAREFULLY BEFORE USING AHNLAB SOFTWARE.

This Software License Agreement (this "Agreement") is a legal agreement by and between you and AhnLab, Inc. ("AhnLab") with regard to the use of the software as defined below ("AhnLab Software").

If you do not agree to be bound by this Agreement, you shall not install, copy or use AhnLab Software.

1. Definitions

1.1 "AhnLab Software" means the software that AhnLab develops or produces and holds the rights such as copyright, ownership right, etc. AhnLab Software may include computer software, any media, printed materials and online or electronic documents, including but not limited to, any and all executable files, additional functions, user manual, help files and other files accompanying AhnLab Software.

1.2 "Computer" means information processors such as server computer, user computer, etc. that can transmit and receive information through connection with communication networks.

1.3 "Appliance" means products that AhnLab sells to customers as a separate form of products produced by installing AhnLab Software in hardware equipment.

1.4 "Use" refers to any and all acts of using AhnLab Software such as storing, installing or executing

☒ I agree

Next

- Check 'I agree' and then click [Next].

- Step 2. Enter License and System Registration Information.

Step 2. License and System Registration

Serial Number

Company Name

AhnLab

Domain Name

AhnLabEPP

Primary DNS Server

8.8.8.8

Secondary DNS Server 1

Secondary DNS Server 2

Previous

Next

- Serial Number: Enter the valid serial number issued after signing the EPP product contract.
- Company Name: Enter the company name.
- Domain Name: Enter the domain name for the EPP domain.
- DNS Server Address: Enter the address of your company DNS or a public DNS server. (e.g. 8.8.8.8)

- Step 3. OTP Settings

Step 3. OTP Settings

Email Server IP Address	127.0.0.1
Port Number	25
SSL	☐ Enable
ID	
Password	
Sender's Email Address	root@local.host

- Email Server IP Address: Enter the IP address of the email server. You need to enter the address in the IPv4 format.
- Port Number: Enter the port number of the email server. You need to enter a value between 1 ~ 65535 for the number.
- SSL: Select whether to enable SSL. If you select to enable it, the SSL protocol will be used to create a secure communication channel. (Default: Disabled)
- ID: Enter the ID to access the email server. You need to enter the ID in an email format.
- Password: Enter the password to access the email server.
- Sender's Email Address: Enter the sender in an email format.

- Step 4. Account Settings

Step 4. Account Settings

ID		
Password		
Confirm Password		
Name		
Email		
Phone		
Allowed IP Address 1		
Allowed IP Address2		
Login Session Timeout		minute(s)
Account Lockout Threshold		minute(s)
Password Validity Period		day(s)

Enter a description.

Previous

Finish

- ID: The admin ID used to login to the web console. You can enter a value between 5 ~ 32 characters for the ID.
- Password: Enter the password for the account.
- Confirm Password: Enter the value identical to the one entered in the Password box.


<Password Rules>

- It should contain a value between 9 ~ 30 characters including both alphanumerical and special characters
- It should not contain consecutive 3 or more identical characters or numbers.
- It should not contain consecutive 3 or more characters and numbers in the key array.
- It should not use identical passwords used in the last 4 instances.

- Name: Name of the administrator. You can enter a name between 1 ~ 128 characters.
- Email: The email address of the admin. You need to enter it in an email format. (e.g. 123@Ahnlab.com-

- Phone (Optional): Enter the phone number of the administrator. You should enter only a number between 0 ~ 9 along with + and -.
- Allowed IP Address: You can only use the allowed IP address to log in to the server. You cannot log in to the product with any unauthorized IP address. You should enter the address in the IPv4 format.
- Login Session Timeout: Enter the timeout for login session. If the admin does not perform any action in the console for the set timeout, the account will be automatically logged out. The session timeout will not be displayed on the screen. You can enter a value between 1 ~ 999 minutes for the timeout. (Default: 20 minutes)
- Account Lockout Threshold: Enter the account lockout time for failed login. If you enter the incorrect password 3 times during login, you cannot login for the set time. You can enter a value between 5 ~ 30 minutes. (Default: 10 minutes)
- Password Validity Period: Enter a value between 30 ~ 180 days for the password validity period. (Default: 180 days)

- Login Web Console

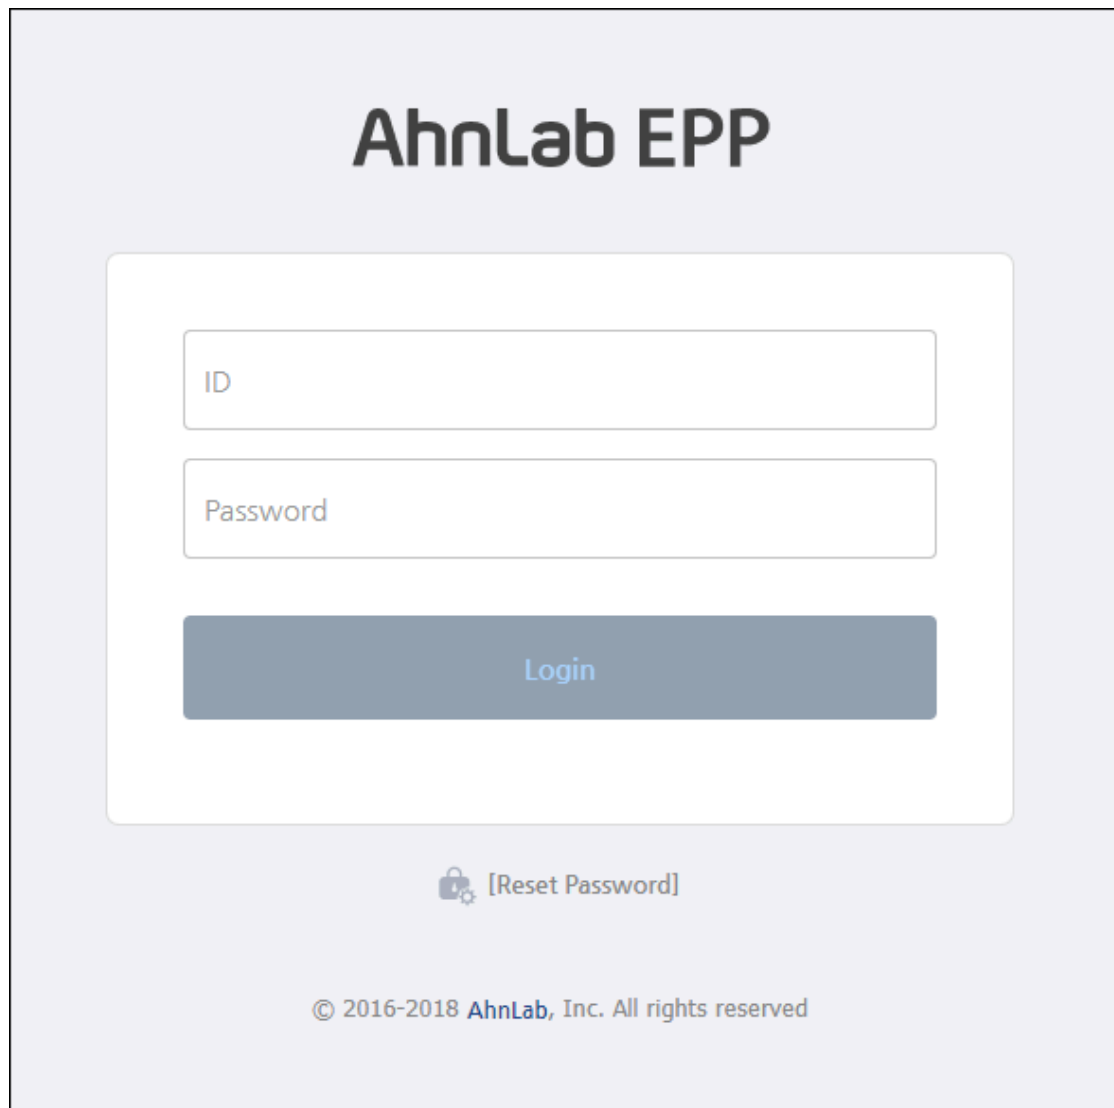

The image shows the login interface for AhnLab EPP. At the top, the text "AhnLab EPP" is displayed in a large, bold, black font. Below this, there is a white rectangular box containing the login form. The form has two input fields: "ID" and "Password", both with light gray placeholder text. Below the input fields is a dark blue button with the word "Login" in white text. Underneath the button, there is a link that says "[Reset Password]" with a small lock icon to its left. At the bottom of the interface, there is a copyright notice: "© 2016-2018 AhnLab, Inc. All rights reserved".

- Use the created account to login the console.

Was this article helpful?

Yes

No

0 out of 0 found this helpful

Have more questions? [Submit a request](#)

[Return to top](#) ^

Recently viewed articles

[OS] EPPM/EDRM Deployment Operating System (Linux) Installation Guide

[EPPM] Preparing for Installation

[EPPM] Specification (Requirements)

[Reference] Global Training Session Materials for EPP & EDR - December 10, 2024

[EPP] Basic Learning Videos

Related articles

[EPPM] EPPM Installation Guide

[EPPM] Master Resgistration

[EPP][ESA] 1.0.15 (New 1.0.15.7) - 2023.9.27

Comments

0 comments



Be the first to write a comment.

© AhnLab, Inc. All rights reserved.

Privacy & Security

English (US)
